

Dedicated to People Flow™



MACHINE-ROOM-LESS FREIGHT AND SERVICE ELEVATOR

KONE TranSys™



Moving freight and heavy loads just got easier

To move freight and heavy loads, you need an elevator that is designed specifically for that purpose:

- Fast and durable hoisting to cope with rough treatment
- A smooth ride to handle fragile loads
- Levelling accuracy for easy loading and unloading
- Full-width doors that maximize the usage of space in the car
- A selection of signalization and interior designs for an easy match to the building's interior.


The powerful and high-performance KONE TranSys™ freight and service elevator solution is ideal for a multitude of demanding vertical transportation tasks in a variety of buildings: supermarkets, shopping malls, airports, warehouses, hospitals, hotels, industrial plants and offices.

This elevator is fully customizable and combines speed, power and premium quality designs.

More hoisting power, lower energy consumption

The power to lift up to 5000 kg

The KONE TranSys™ freight elevator solution is based on the machine room-less KONE MonoSpace® platform. It incorporates the highly reliable and eco-efficient KONE EcoDisc® hoisting machine for exceptional power and performance.

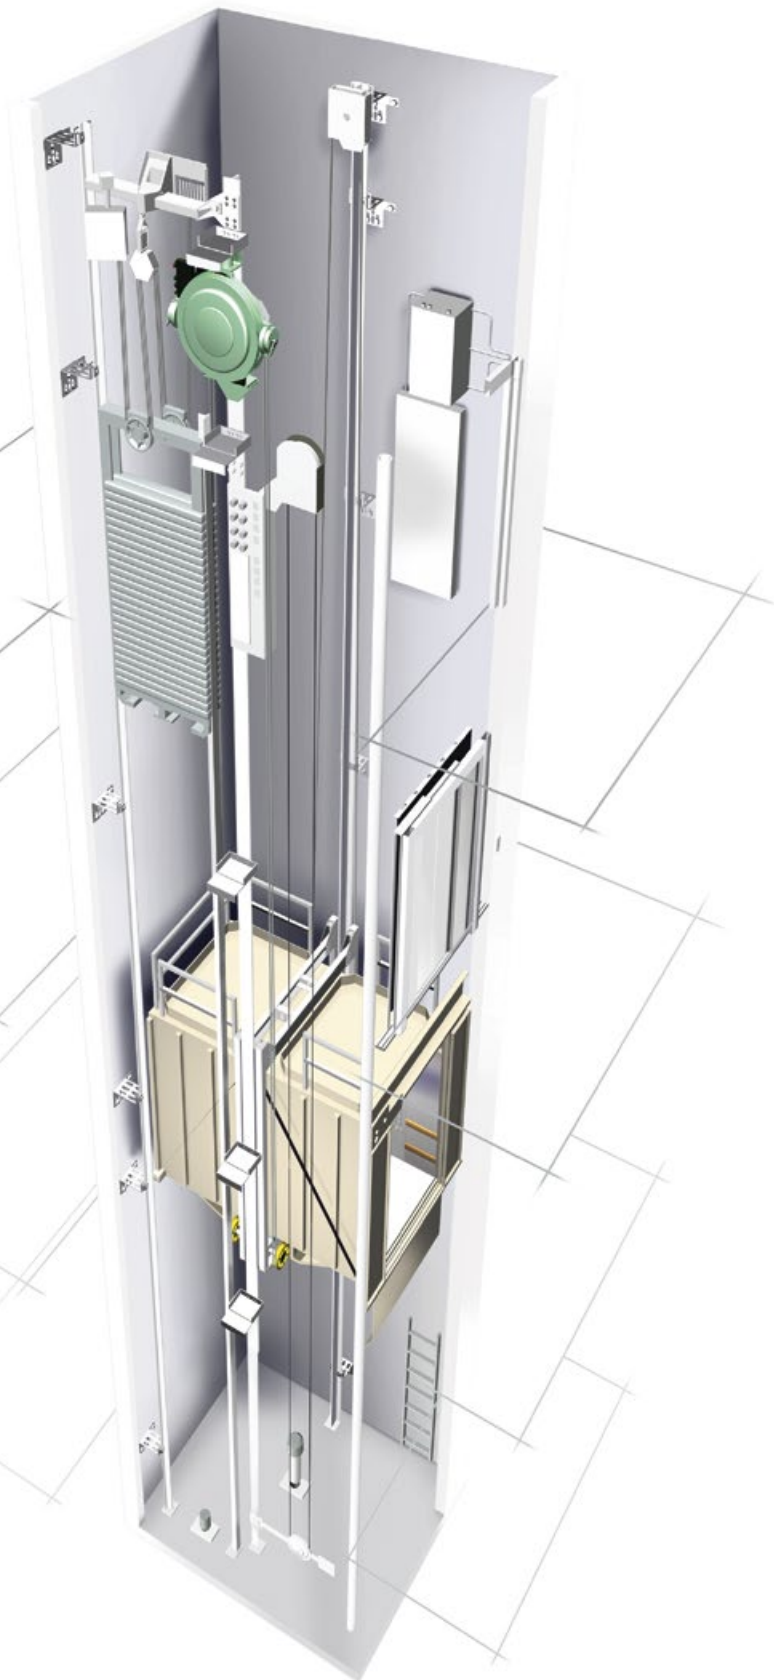

Outstanding power and performance

Exceptionally space-efficient

The KONE TranSys™ freight elevator needs no machine-room at all. This means:

- Easier positioning of the elevator in the building
- Reduced building construction time and costs
- More efficient, safer elevator installation processes
- Up to 30m³ extra building space that can be used more profitably.

Reliable, high performance

The KONE TranSys freight and service elevator solution provides reliable operation, outstanding traffic performance and a smooth ride at up to 1.6 meters per second. The ride quality is the result of the motor's low rotational speeds. The low friction, gearless construction of the KONE EcoDisc® hoist reduces wear, so it increases the reliability and durability of the machine.






Easy loading and unloading

Powered by the gearless KONE EcoDisc® machine, the KONE TranSys freight and service elevator solution features quiet operation, smooth running to protect fragile loads and ± 5 mm levelling accuracy to make loading and unloading easier.

Wide load range

The KONE TranSys elevator is available in different car sizes to transport freight and other heavy loads. With a maximum load capacity of 5000 kg, it can meet virtually every transportation requirement in a variety of building types.

Main specifications	
Load capacity	1000 – 5000 kg/13 – 66 person
Speed	0.5 – 1.6 m/s
Max. travel	40 m up to 4000 kg, 23 m up to 5000 kg
No. of floors	12, also applicable for TTC
Persons	13 – 66
Group size	Max. 4/group
Hoisting machine	Gearless KONE EcoDisc®
Doors	Automatic center opening
Car door height	Up to 2400 cm
Code compliance	EU directive 95/16; EN81-1:1998 Optional EN81-20/50, EN81-70, EN81-71 and EN81-73

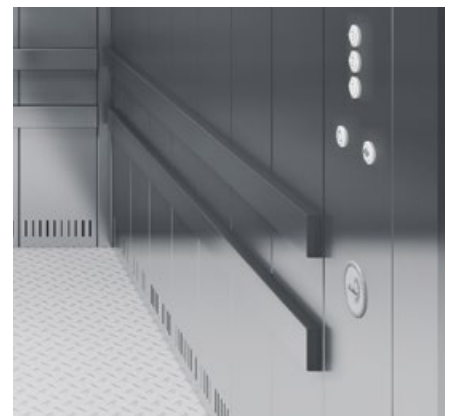

Durable design


The KONE TranSys™ cars are built for the job. The car is finished in stainless or powder-painted steel, protected by buffer rails, and equipped with direct, fluorescent lighting. A second car operating panel is optional and combined with a 400 mm minimum floor-to-floor distance to suit the through-car application.

With a wide selection of wall, floor and landing door materials, the elevator can be seamlessly integrated into the building's interior.

We can offer optional EN81-71 cat1 compliant vandal resistant elevators as standard delivery. More rugged EN81-71 cat2 compliant elevators are available on request.

Extra wide doors

The KONE TranSys elevator is equipped with full-width, center opening doors, which retract fully for the easy movement of passengers and goods. Further door area protection includes a curtain of light or 3D passenger detection. The strong double skin door panels are finished in stainless, powder-painted steel or zinc coated steel.

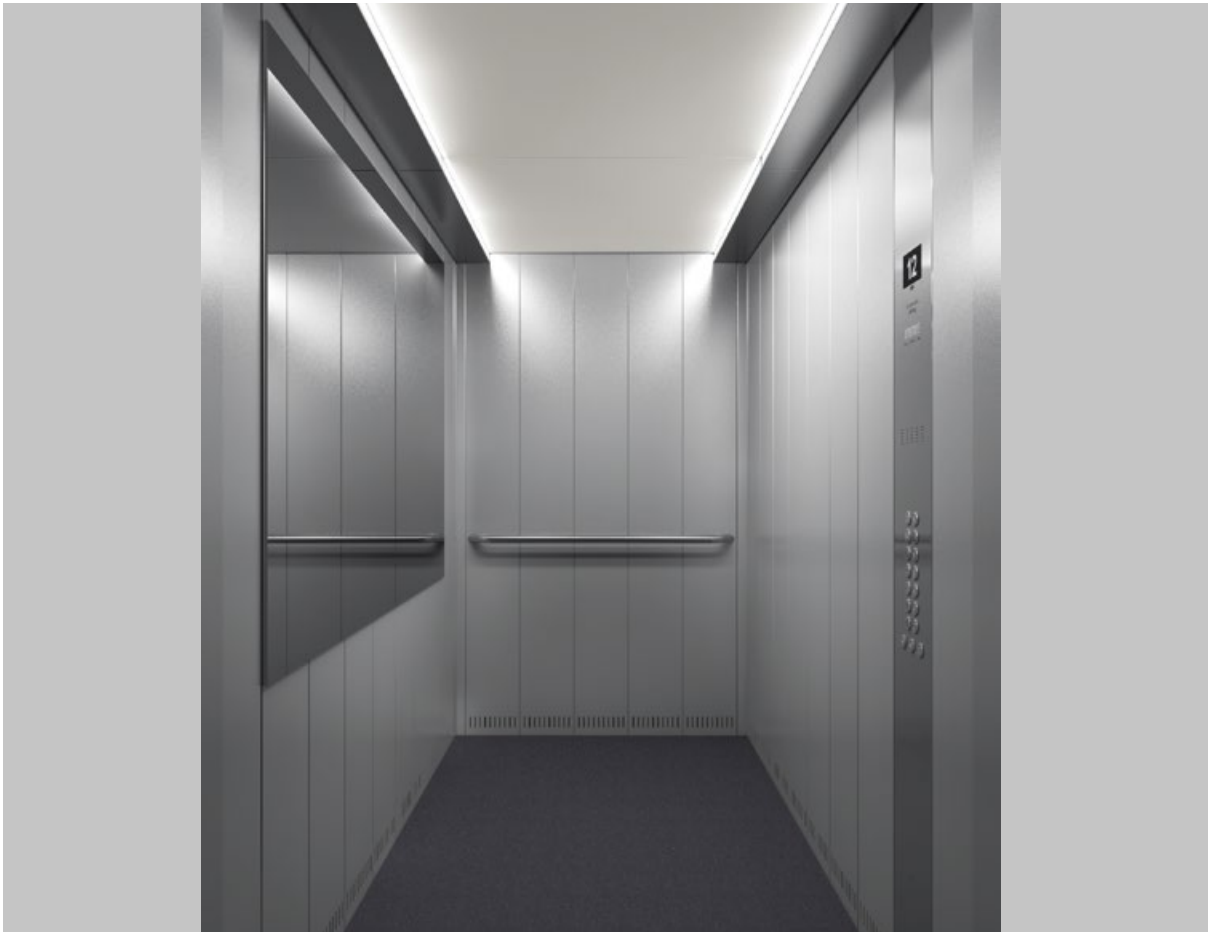

A multi-purpose elevator

Passenger elevator

This fast yet powerful elevator can also be used as a passenger elevator in shopping centres and airports where large elevator cars and fast speeds ensure uninterrupted people flow throughout the building.

KONE Vehicle™ elevator

The KONE TranSys freight and service elevator is even suitable for vehicle transportation from underground or rooftop car parks where space is at a premium.



Its main features include:

- Machine-room-less technology that allows for extra rooftop space
- Faster ride compared to hydraulic elevators
- Energy saving due to gearless hoisting technology
- Patented lightweight floor. Saves approx. 2000 kg in a typical 3000 x 6000 mm car compared to a conventional floor
- Full car width doors
- Easy elevator call with a separate landing call station on a raised pedestal
- KONE 3D passenger detector opens the elevator doors as you approach and keeps them open as you enter or exit

KONE TranSys™ signalization

Select from a wide range of durable and user-friendly elevator signalization series


KSS 140



KSI 143



KSH 140

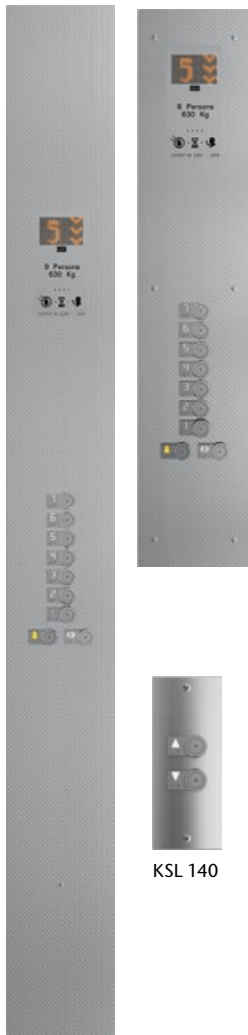

KSL 140

KSC 143

Vandal resistant
signalization
(EN81-70 compatible)

Car Operating Panel (COP)

Faceplate finishing:
Scottish Quad (K) stainless steel or
Asturias Satin (F) stainless steel

Display:
Scrolling dot matrix

KSS 305



KSI 370/371



KSI 470/471



KSH 370

KSH 470

KSL 420

KSC 305

Car Operating Panel (COP)

Faceplate finishing:
Asturias Satin (F) stainless steel

Display:
KSC 305: 7-segment
KSC 306: Dot matrix


KSS 670



KSI 673



KSI 573



KSA 673



KSA 573



KSH 670



KSH 570



KSC 673



KSL 670



KSL 570

Car Operating Panel (COP)

Faceplate finishing:
Asturias Satin (F) stainless steel

Display:
KSC 673: Scrolling dot matrix

Visual options

Ceilings



LF1*/LF1V**
Lighting: T5 fluorescent tubes
Finishing: Asturias Satin (F)
Pure white (RAL9010)



CL88
Lighting: LED spot
Finishing: Asturias Satin (F)
Cloud White (P50)



CL94/ CL94V**
Lighting: T5 fluorescent tubes
Finishing: Asturias Satin (F)
Cloud White (P50)



CL95
Lighting: T5 fluorescent tubes
Frame finishing: Asturias Satin (F)
Center panel: Cloud White (P50)

* LF1 is the only ceiling for cars > 2500 kg
** Asturias Satin is the only finishing material for CL94V/LF1V

Wall materials

Painted steel



P51
Misty Gray




P52
Sunny Yellow



P53
Dawn Red




P54
Sky Blue



P56
Tele Gray

Steel



Z
Zinc coated, local paint or decoration

Brushed stainless steel




A
Acid proof



F/F1
Asturias Satin



K
Scottish Quad



TS1
Flemish Linen



SS4
Aqua Weave

Coated steel



R30
Nordic Gray

Textured stainless steel

Floor materials

Rubber



RC6
Dallas Black



RC21
Denver Gray



RC23
Coral red



RC24
Dusk Blue

Metal plate



AL
Aluminum



SS
Stainless steel



ST
Chequered steel



Z
Raw surface for local finishing


Vinyl




VF25
Flakey Gray

KES 600 / KES 800 door finishes


Brushed stainless steel




A
Acid Proof



F/F1
Asturias Satin



K
Scottish Quad



TS1
Flemish Linen




SS4
Aqua Weave

Coated steel




R30
Nordic Gray

Painted steel



P51
Misty Gray



P56
Tele Gray

Glass



TW1
Glass


Handrails




HR64
Round, bent ends
EN 81-71 Cat 1 compliant
Finishings: Brushed stainless steel (F)
Murano mirror (H)




HR94
Round, bent ends
EN 81-71 Cat 2 compliant
Finishings: Brushed stainless steel (F)



HR64 and HR94
Tube with corner module



HR64 and HR94 (EN81-70)
Tube with rounded ends



HR64 and HR94 (EN81-70)
Tube with corner module and rounded ends

Buffer rails



BR1
Flemish Linen (TS1)
textured stainless steel



PR5
Wood Oak/Beech



PR6
Brushed stainless steel

Mirror



Mirrors are available as partial height, full width with clear glass without fixings

Planning data

Compliant with EN81-20 code

Car with front wall

AMD2 single entrance (SEC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame		
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm
0.5	17	1275	1200	2300	1100	1250	230	550	2030	2715	1400	155	475
1.0	17	1275	1200	2300	1100	1250	230	550	2030	2715	1400	155	475
0.5	21	1600	1400	2400	1300	1450	230	650	2330	2815	1600	155	575
1.0	21	1600	1400	2400	1300	1450	230	650	2330	2815	1600	155	575
0.5	26	2000	1500	2700	1300	1450	290	650	2390	3115	1600	215	575
1.0	26	2000	1500	2700	1300	1450	290	650	2390	3115	1600	215	575
0.5	33	2500	1800	2700	1300	1450	445	695	2590	3115	1600	370	620
0.5	33	2500	1800	2700	1400	1550	400	705	2655	3115	1700	325	630
1.0	33	2500	1800	2700	1300	1450	665	855	2970	3115	1600	590	780
1.0	33	2500	1800	2700	1400	1550	615	805	2970	3115	1700	540	730
1.6	33	2500	1800	2700	1300	1450	665	855	2970	3115	1600	590	780
1.6	33	2500	1800	2700	1400	1550	615	805	2970	3115	1700	540	730

AMD3 single entrance (SEC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame			
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm	
0,5	21	1600	1400	2400	1300	1450	355	485	2290	2855	1600	277	410	
1.0	21	1600	1400	2400	1300	1450	355	485	2290	2855	1600	277	410	
0,5	26	2000	1500	2700	1300	1450	355	545	2350	3155	1600	277	470	
1.0	26	2000	1500	2700	1300	1450	355	545	2350	3155	1600	277	470	
0,5	33	2500	1800	2650	1700	1850	430	495	2775	3105	2000	355	420	
1.0	33	2500	1800	2650	1700	1850	430	495	2775	3105	2000	355	420	MX14
1.0	33	2500	1800	2650	1700	1850	465	655	2970	3105	2000	390	580	MX20
1,6	33	2500	1800	2650	1700	1850	465	655	2970	3105	2000	390	580	
0,5	40	3000	2000	2700	1800	1950	515	705	3170	3155	2100	440	630	
1.0	40	3000	2000	2700	1800	1950	515	705	3170	3155	2100	440	630	
1,6	40	3000	2000	2700	1800	1950	515	705	3170	3155	2100	440	630	
0,5	40	3000	2500	5500	2200	2350	565	705	3620	5955	2500	490	630	
1.0	40	3000	2500	5500	2200	2350	565	705	3620	5955	2500	490	630	
0,5	46	3500	2100	3000	1800	1950	565	705	3220	3455	2100	490	630	
1.0	46	3500	2100	3000	1800	1950	565	705	3220	3455	2100	490	630	
0,5	53	4000	2100	3400	1800	1950	565	705	3220	3855	2100	490	630	
1.0	53	4000	2100	3400	1800	1950	565	705	3220	3855	2100	490	630	
0,5	53	4000	3000	6000	2700	2850	675	705	4230	6455	3000	600	630	
1.0	53	4000	3000	6000	2700	2850	675	705	4230	6455	3000	600	630	
0,5	60	4500	2500	3100	2200	2350	565	705	3620	3555	2500	490	630	
1.0	60	4500	2500	3100	2200	2350	565	705	3620	3555	2500	490	630	
0,5	66	5000	2500	3500	2200	2350	565	705	3620	3955	2500	490	630	
1.0	66	5000	2500	3500	2200	2350	565	705	3620	3955	2500	490	630	

AMD5 single entrance (SEC) vehicle

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame		
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm
0.5	40	3000	2500	5500	2200	2350	565	705	3620	6055	2500	490	630
1.0	40	3000	2500	5500	2200	2350	565	705	3620	6055	2500	490	630
0.5	53	4000	3000	6000	2700	2850	565	705	4120	6555	3000	490	630
1.0	53	4000	3000	6000	2700	2850	565	705	4120	6555	3000	490	630

Car with front wall

AMD2 through-type (TTC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame			
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm	
0.5	17	1275	1200	2250	1100	1250	230	550	2030	2870	1400	155	475	
1.0	17	1275	1200	2250	1100	1250	230	550	2030	2870	1400	155	475	
0.5	21	1600	1400	2300	1300	1450	230	650	2330	2920	1600	155	575	
1.0	21	1600	1400	2300	1300	1450	230	650	2330	2920	1600	155	575	
0.5	26	2000	1500	2600	1300	1450	290	650	2390	3115	1600	215	575	
1.0	26	2000	1500	2600	1300	1450	290	650	2390	3115	1600	215	575	
0.5	33	2500	1800	2600	1300	1450	445	695	2590	3220	1600	370	620	
0.5	33	2500	1800	2600	1400	1550	370	705	2655	3115	1700	325	630	
1.0	33	2500	1800	2600	1300	1450	445	695	2590	3220	1600	370	620	MX14
1.0	33	2500	1800	2600	1400	1550	370	705	2655	3115	1700	325	630	MX20
1.0	33	2500	1800	2600	1300	1450	665	855	2970	3220	1600	590	780	MX14
1.0	33	2500	1800	2600	1400	1550	615	805	2970	3220	1700	540	730	MX20
1.6	33	2500	1800	2600	1300	1450	665	855	2970	3220	1600	590	780	
1.6	33	2500	1800	2600	1400	1550	615	805	2970	3220	1700	540	730	

AMD3 through-type (TTC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame			
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm	
0.5	21	1600	1400	2300	1300	1450	355	485	2290	2855	1600	280	410	
1.0	21	1600	1400	2300	1300	1450	355	485	2290	2855	1600	280	410	
0.5	26	2000	1500	2600	1300	1450	355	545	2350	3155	1600	280	470	
1.0	26	2000	1500	2600	1300	1450	355	545	2350	3155	1600	280	470	
0.5	33	2500	1800	2550	1700	1850	430	495	2775	3250	2000	355	420	
1.0	33	2500	1800	2550	1700	1850	465	655	2970	3250	2000	390	580	
1.6	33	2500	1800	2550	1700	1850	465	655	2970	3250	2000	390	580	
0.5	40	3000	2000	2700	1800	1950	515	705	3170	3400	2100	440	630	
1.0	40	3000	2000	2700	1800	1950	515	705	3170	3400	2100	440	630	
1.6	40	3000	2000	2700	1800	1950	515	705	3170	3400	2100	440	630	
0.5	40	3000	2500	5500	2200	2350	565	705	3620	6200	2500	490	630	
1.0	40	3000	2500	5500	2200	2350	565	705	3620	6200	2500	490	630	
0.5	46	3500	2100	2950	1800	1950	565	705	3220	3650	2100	490	630	
1.0	46	3500	2100	2950	1800	1950	565	705	3220	3650	2100	490	630	
0.5	53	4000	2100	3300	1800	1950	565	705	3220	4000	2100	490	630	
1.0	53	4000	2100	3300	1800	1950	565	705	3220	4000	2100	490	630	
0.5	53	4000	3000	6000	2700	2850	675	705	4230	6700	3000	600	630	
1.0	53	4000	3000	6000	2700	2850	675	705	4230	6700	3000	600	630	
0.5	60	4500	2450	3100	2100	2250	590	730	3570	3800	2400	515	655	
1.0	60	4500	2450	3100	2100	2250	590	730	3570	3800	2400	515	655	
0.5	66	5000	2400	3500	2100	2250	565	705	3520	4200	2400	490	630	
1.0	66	5000	2400	3500	2100	2250	565	705	3520	4200	2400	490	630	

AMD5 through-type (TTC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame			
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm	
0.5	40	3000	2500	5500	2200	2350	565	705	3620	6400	2500	490	630	
1.0	40	3000	2500	5500	2200	2350	565	705	3620	6400	2500	490	630	
0.5	53	4000	3000	6000	2700	2850	565	705	4120	6900	3000	490	630	
1.0	53	4000	3000	6000	2700	2850	565	705	4120	6900	3000	490	630	

Car without front wall

AMD2 single entrance (SEC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame		
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm
0.5	13	1000	1300	1750	1300	1450	180	650	2280	2245	1600	105	575
1.0	13	1000	1300	1750	1300	1450	180	650	2280	2220	1600	105	575
0.5	21	1600	1400	2400	1400	1550	220	700	2470	2780	1700	145	625
1.0	21	1600	1400	2400	1400	1550	220	700	2470	2780	1700	145	625
0.5	24	1800	1400	2550	1400	1550	220	700	2470	2930	1700	145	625
1.0	24	1800	1400	2550	1400	1550	220	700	2470	2930	1700	145	625

AMD3 single entrance (SEC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame			
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm	
0.5	13	1000	1300	1750	1300	1450	330	435	2215	2245	1600	255	360	
1.0	13	1000	1300	1750	1300	1450	330	435	2215	2220	1600	255	360	
0.5	21	1600	1400	2400	1400	1550	355	435	2340	2780	1700	280	360	
1.0	21	1600	1400	2400	1400	1550	355	435	2340	2780	1700	280	360	
0.5	24	1800	1400	2550	1400	1550	355	435	2340	2780	1700	280	370	
1.0	24	1800	1400	2550	1400	1550	355	435	2340	2780	1700	280	370	
0.5	26	2000	1500	2700	1500	1650	380	445	2475	3080	1800	305	370	
1.0	26	2000	1500	2700	1500	1650	380	445	2475	3080	1800	305	370	
0.5	33	2500	1800	2700	1800	1950	450	450	2850	3080	2100	375	375	
1.0	33	2500	1800	2700	1800	1950	450	450	2850	3080	2100	375	375	MX14
1.0	33	2500	1800	2700	1800	1950	450	605	3005	3080	2100	375	530	MX20
1.6	33	2500	1800	2700	1800	1950	450	605	3005	3080	2100	375	530	
0.5	40	3000	2000	2750	2000	2150	500	605	3255	3130	2300	425	530	
1.0	40	3000	2000	2750	2000	2150	500	605	3255	3130	2300	425	530	
1.6	40	3000	2000	2750	2000	2150	500	605	3255	3130	2300	425	530	
0.5	46	3500	2100	3000	2100	2250	525	555	3330	3380	2400	450	480	
1.0	46	3500	2100	3000	2100	2250	525	555	3330	3380	2400	450	480	
0.5	53	4000	2100	3400	2100	2250	525	555	3330	3780	2400	450	480	
1.0	53	4000	2100	3400	2100	2250	525	555	3330	3780	2400	450	480	

AMD5 single entrance (SEC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame		
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm
0.5	60	4500	2500	3100	2500	2650	495	555	3700	3580	2800	420	480
1.0	60	4500	2500	3100	2500	2650	495	555	3700	3580	2800	420	480
0.5	66	5000	2500	3500	2500	2650	495	555	3700	3980	2800	420	480
1.0	66	5000	2500	3500	2500	2650	495	555	3700	3980	2800	420	480

AMD5 single entrance (SEC) vehicle

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame		
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm
0.5	40	3000	2500	5575	2500	2650	495	555	3700	6055	2800	420	480
1.0	40	3000	2500	5575	2500	2650	495	555	3700	6055	2800	420	480
0.5	53	4000	3000	6075	3000	3150	580	555	4285	6555	3300	505	480
1.0	53	4000	3000	6075	3000	3150	580	555	4285	6555	3300	505	480

Car without front wall

AMD2 through-type (TTC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame		
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm
0.5	13	1000	1100	2100	1100	1250	180	550	1980	2650	1400	105	475
1.0	13	1000	1100	2100	1100	1250	180	550	1980	2650	1400	105	475
0.5	21	1600	1400	2400	1400	1550	220	700	2470	2950	1700	145	625
1.0	21	1600	1400	2400	1400	1550	220	700	2470	2950	1700	145	625
0.5	24	1800	1400	2550	1400	1550	220	700	2470	3100	1700	145	625
1.0	24	1800	1400	2550	1400	1550	220	700	2470	3100	1700	145	625

AMD3 through-type (TTC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame			
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm	
0.5	21	1600	1400	2400	1400	1550	355	435	2340	2950	1700	280	360	
1.0	21	1600	1400	2400	1400	1550	355	435	2340	2950	1700	280	360	
0.5	24	1800	1400	2550	1400	1550	355	435	2340	2950	1700	280	370	
1.0	24	1800	1400	2550	1400	1550	355	435	2340	2950	1700	280	370	
0.5	26	2000	1500	2700	1500	1650	380	445	2475	3250	1800	305	370	
1.0	26	2000	1500	2700	1500	1650	380	445	2475	3250	1800	305	370	
0.5	33	2500	1800	2700	1800	1950	450	450	2850	3250	2100	375	375	
1.0	33	2500	1800	2700	1800	1950	450	450	2850	3250	2100	375	375	MX14
1.0	33	2500	1800	2700	1800	1950	450	605	3005	3250	2100	375	530	MX20
1.6	33	2500	1800	2700	1800	1950	450	605	3005	3250	2100	375	530	
0.5	40	3000	2000	2750	2000	2150	500	605	3255	3300	2300	425	530	
1.0	40	3000	2000	2750	2000	2150	500	605	3255	3300	2300	425	530	
1.6	40	3000	2000	2750	2000	2150	500	605	3255	3300	2300	425	530	
0.5	46	3500	2100	3000	2100	2250	525	555	3330	3550	2400	450	480	
1.0	46	3500	2100	3000	2100	2250	525	555	3330	3550	2400	450	480	
0.5	53	4000	2100	3400	2100	2250	525	555	3330	3950	2400	450	480	
1.0	53	4000	2100	3400	2100	2250	525	555	3330	3950	2400	450	480	


AMD5 through-type (TTC)

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame		
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm
0.5	60	4500	2400	3300	2400	2550	480	555	3585	4050	2700	405	480
1.0	60	4500	2400	3300	2400	2550	480	555	3585	4050	2700	405	480
0.5	66	5000	2400	3650	2400	2550	480	555	3585	4400	2700	405	480
1.0	66	5000	2400	3650	2400	2550	480	555	3585	4400	2700	405	480



AMD5 through-type (TTC) vehicle

Rated speed m/s	Passengers	Rated load kg	BB mm	DD mm	LL mm	Narrow frame					Frame		
						LR mm	FW1 mm	FW mm	WW mm	WD mm	LR mm	FW1 mm	FW mm
0.5	53	4000	3000	6150	3000	3150	580	555	4285	6900	3300	505	480
1.0	53	4000	3000	6150	3000	3150	580	555	4285	6900	3300	505	480


Car with front wall, door LL ≠ BB*

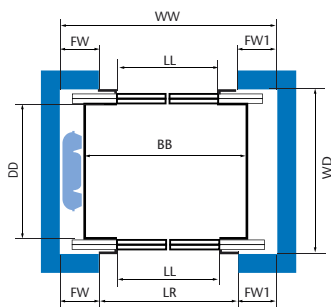

Car without front wall, door LL = BB*

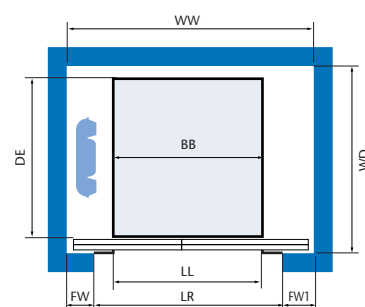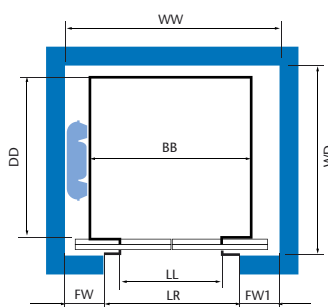

* FW is machine side, FW1 is car single side

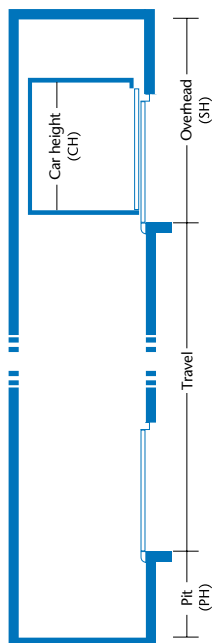

Vertical shaft arrangement for a single and a dual entrance car

Speed m/s	Person / load kg	Min. headroom height (SH) mm	Min. pit height (PH) mm
0.5 - 1.0	13 / 1000	CH + 1700	1250
0.5 - 1.0	17 / 1275	CH + 1700	1250
0.5 - 1.0	21 / 1600	CH + 1700	1250
0.5 - 1.0	26 / 2000	CH + 1700	1250
0.5 - 1.0	33 / 2500	4100	1600
1.6	33 / 2500	4100	2150
0.5 - 1.0	40 / 3000	4100	1600
0.5 - 1.0	46 / 3500	4100	1750
1.6	46 / 3500	4100	1750
0.5 - 1.0	53 / 4000	4100	1750
0.5 - 1.0	60 / 4500	4200	2100
0.5 - 1.0	66 / 5000	4200	2100
Vehicle elevators		4400	2400

- MAX PH = 2500 (A-process)
- $Q \leq 2000$ kg PH = PH + 500 mm if safety gear on CWT side is request
- $Q = 2500$ kg PH = 2150 mm if safety gear on CWT side is request.
- $Q > 2500$ kg CWT safety gear only case by case

Control system features

System features	Availability
KONE Remote Monitoring with GSM connection	○
EN81-71, Vandal resistant lifts, category 1	○
EN81-73, Behaviour of lifts in the event of fire	○
KONE E-link	○
Automatic evacuation to nearest landing (EBD A)	○
Eco-efficiency features	
Regenerative drive	○*
Fluorescent car lighting	●
Car light standby (OCL A)	●
Ventilation standby (OCV A)	○
Signalization dimming	●
Drive standby	○*
Corridor illuminating control (CIC)	○
Accessibility features	
EN81-70, Accessibility to lifts for persons including persons with disability	○
Curtain of light (COL)	○
3D passenger detector	○
Lift announcer (ACU)	○
Door open with extended door time (DOE B)	○
Accurate leveling doors open (ACL/B)	○
Security features	
Locking of car calls (LOC)	○
Priority call in car (PRC)	○

* Please consult your KONE sales professional

Option ○
Built in ●

For your notes



KONE provides innovative and eco-efficient solutions for elevators, escalators, automatic building doors and the systems that integrate them with today's intelligent buildings.

We support our customers every step of the way; from design, manufacturing and installation to maintenance and modernization. KONE is a global leader in helping our customers manage the smooth flow of people and goods throughout their buildings.

Our commitment to customers is present in all KONE solutions. This makes us a reliable partner throughout the life cycle of the building. We challenge the conventional wisdom of the industry. We are fast, flexible, and we have a well-deserved reputation as a technology leader, with such innovations as KONE MonoSpace®, KONE EcoMod™ and KONE UltraRope™.

KONE employs on average 47,000 dedicated experts to serve you globally and locally.

KONE Corporation
www.kone.com